

This draft, dated 23 October 2003, prepared by DLA-CC, has not been approved and is subject to modification. DO NOT USE PRIOR TO APPROVAL. (Project 6060-0154).

METRIC

MIL-C-83522/16B
W/AMENDMENT 1
DRAFT
SUPERSEDING
MIL-C-83522/16B
11 May 1995

MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, SINGLE TERMINUS, PLUG, BAYONET COUPLING (ST STYLE),
2.5 MILLIMETERS DIAMETER FERRULE, EPOXY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-83522.


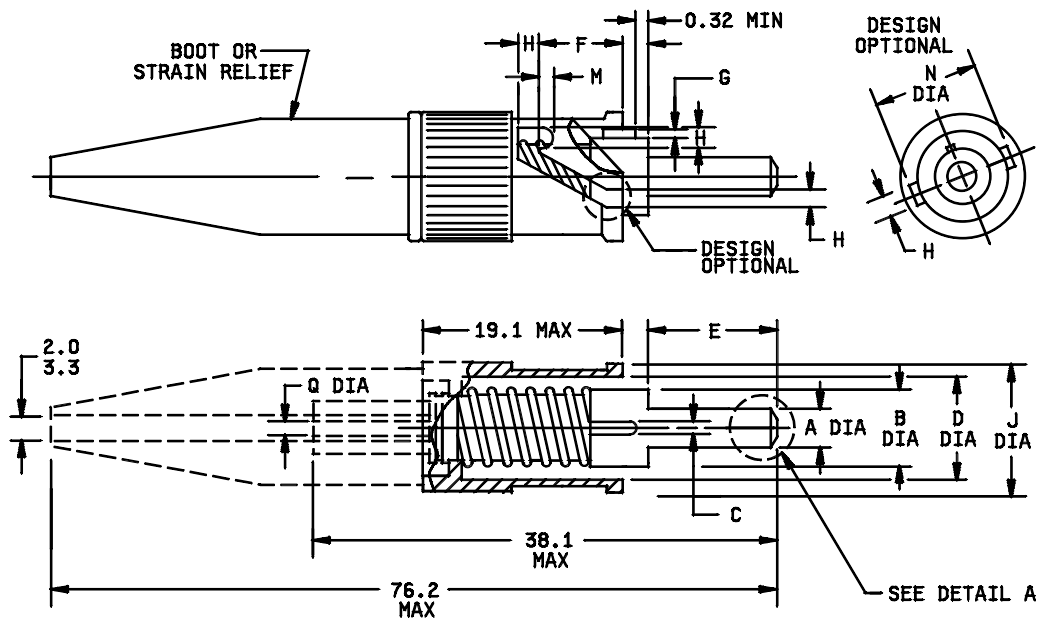


FIGURE 1. Dimensions and configuration.

MIL-C-83522/16B
W/AMENDMENT 1

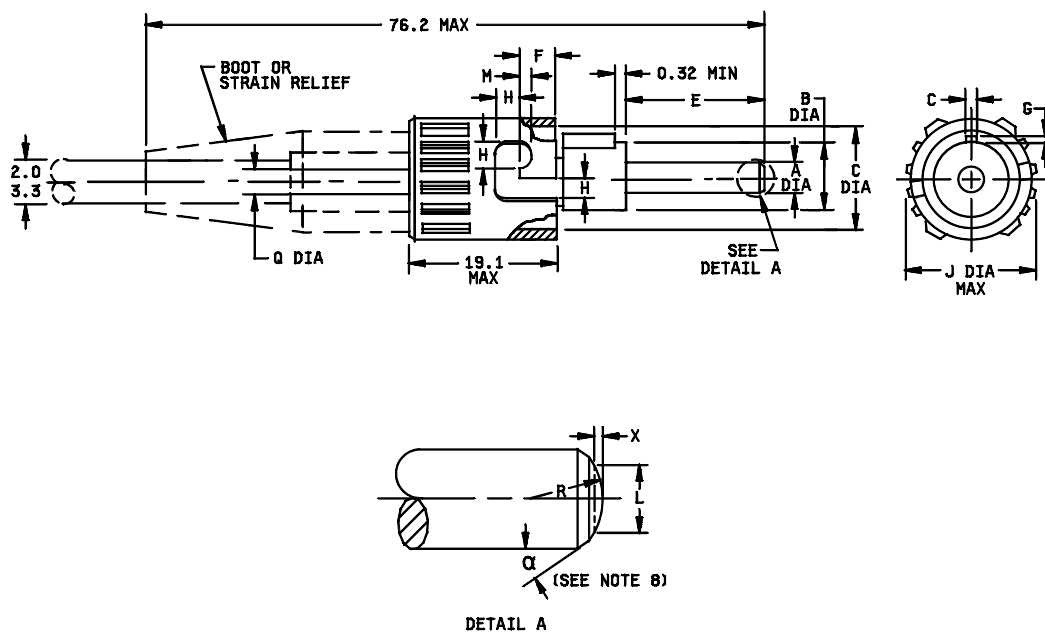

mm	Inches
0.32	.0126
2.0	.08
3.3	.13
19.1	.75
38.1	1.50

FIGURE 1. Dimensions and configuration - Continued.

MIL-C-83522/16B
W/AMENDMENT 1

Letter	Millimeters		Inches		Notes
	Min	Max	Min	Max	
A (MM/SM)	2.4985	2.4995	0.09837	0.09841	3
A (MM)	2.498	2.500	0.0983	0.0984	3
B	5.25	5.38	0.207	0.212	
C	0.91	1.07	0.036	0.042	
D	7.06 min		0.278 min		
E	7.75	8.00	0.305	0.315	
F	2.56	4.50	0.101	0.177	
G	0.58	0.89	0.023	0.035	
H	1.60 min		0.063 min		
J	9.40	9.80	0.370	0.386	
L	2.00	2.00	0.079	0.079	4
M	0.64	1.12	0.025	0.044	
N	8.56 min		0.337 min		5
Q	1.04	1.60	0.041	0.063	
R (MM/SM)	8	25	0.3	1.0	6
R (MM)	8 min		0.3 min		6
X (MM/SM)	0.020	0.063	0.0008	0.0025	7
X (MM)	0.000	0.063	0.0000	0.0025	7

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.
3. Use A (SM/MM) for single mode applications. Use A (SM/MM) or A (MM) for multimode applications.
4. L dimension is the diameter of a circle on the surface of the ferrule that is concentric with the axis of the ferrule.
5. Design optional.
6. R dimension is for reference or conceptual design considerations only. This dimension is the radius of the end of the ferrule when the surface of the ferrule is spherical, and L is as given.
7. X dimension is the distance that the apex of the end of the ferrule extends beyond the circle described in note 4.
8. • angle to be between 20° and 35°.

FIGURE 1. Dimensions and configuration - Continued.

MIL-C-83522/16B
W/AMENDMENT 1

REQUIREMENTS:

Metals: The plug housing and other metal components shall be of corrosion resistant steel in accordance with ~~QQ-S-763, class 303/316L~~ or ASTM A-276, designation S31803, or nickel-plated brass, alloy 345 or 360, in accordance with ASTM B-16.

Ferrule material: Ceramic (zirconia).

The dust cover, strain relief boot, and protective cap shall be made of thermoplastic or fluorosilicone.

Epoxies: Use an epoxy approved by the qualifying activity.

Dimensions and configuration: See figure 1.

Fiber optic cable requirements:

Cable configuration: In accordance with MIL-~~C~~PRF-85045.

Fiber diameter: 50/125 μm , 62.5/125 μm , and 100/140 μm , with the following respective tolerances: 125 ± 2 μm (MM), 125 ± 1 μm (MM/SM), 140 ± 2 μm (MM).

Fiber optic contact:

Method optical alignment: Sleeve/ferrule.

Lens configuration: Not applicable.

Coating requirements: Not applicable.

Nuclear radiation resistance: Not applicable.

Weight: 20 grams maximum.

Polarization: Key/slot.

Safety wire holes: Not required.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: Not applicable.

Lubricants: Not applicable.

MIL-C-83522/16B
W/AMENDMENT 1

Water submersion: Not applicable.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Tensile loading: The load shall be 230 newtons minimum and shall not result in any physical damage. Optical properties shall be monitored before and after load. The load shall not be applied to the coupling mechanism. Optical transmittance measurements are not required during the test for the non-locking connectors.

Dust (fine sand): Applicable. Perform as specified in the requirements of MIL-C-83522D with the following modifications:

- a. The connectors shall not be rotated during steps 1 and 3. Each connector shall be oriented in the chamber such that the key slot is in line with the oncoming air flow. The connectors shall be affixed in such a manner that the orientation of the connector does not change throughout the duration of the test.
- b. The change in optical transmittance shall be measured before the dust test, during the 6 hour exposure period of step 1, before step 3, during the 6 hour exposure period of step 3, and after the test. Samples shall be visually examined, after cleaning, at the conclusion of the dust test.

Ozone exposure: Not applicable.

High impact shock: Applicable to single mode and multimode locking and non-locking connectors.

Fluid immersion: Not applicable.

Residual magnetism: Not applicable.

Shock: For SM/MM connectors assembled on single-mode fiber, signal discontinuity is not applicable during shock. For MM connectors and SM/MM connectors assembled on multimode fiber, signal discontinuity is applicable during shock.

Plug accessories: Each plug shall be packaged with a minimum of one crimp ferrule, one dust cover, and one strain relief boot.

Protective cover: The protective cover shall consist of a lanyard which attaches to the optical fiber cable and a cap for covering the connector (see figure 2). The protective cover shall be installable after the connector termination process is complete. The protective cover shall be subjected only to the temperature/humidity cycling and fungus tests. The

MIL-C-83522/16B
W/AMENDMENT 1

protective cover shall not be provided with the plug connector.

Crimp sleeve: The crimp sleeve shall accept single fiber cordage with a maximum outer diameter of 2.50 mm (.984 inch). The plug connector shall meet all requirements when the crimp sleeve is assembled to the plug connector using one of the following: A hex crimp die measuring 4.84 mm ±.05 mm (.190 inch ±.001 inch) across the flats, a circular indent ring crimp die with a 2.67 mm ±.08 mm (.105 inch ±.003 inch) minor diameter and a 3.43 mm ±.008 mm (.135 inch ±.003 inch) major diameter, or a circular indent ring crimp die with a 2.29 mm ±.08 mm (.090 inch ±.003 inch) minor diameter and a 3.05 mm ±.008 mm (.120 inch ±.003 inch) major diameter.

Group A inspection: During group A inspections, plug dimension E shall be verified on all items. All other dimensions may be verified on a sampled basis. Weight may be verified on a sampled basis. The qualifying activity shall be notified of all failures during any sampled inspections.

The plug connector mates with MIL-C-83522/17 adapter and MIL-C-83522/18 PC mount receptacle.

Part or Identifying Number (PIN) is a new term encompassing previous terms used in specifications such as part number, type designator, or identification number and is as follows:

M83522/16 - X X X X
Configuration
Temperature
Fiber size
Additional considerations

Configuration:
A (locking boot, long cap)
~~B (nonlocking boot, short cap)~~
~~C (nonlocking boot, long cap)~~
D (nonlocking boot, either long or short cap)
E (protective cover)
Temperature:
H (high)
N (normal)
Fiber size:
X (type I) (125 •m, MM)
Y (type II) (125 •m, MM/SM)
Z (type I) (140 •m, MM)
Additional consideration:
S qualified to space flight requirements

Patent notice: ~~Deleted. The US Government has a royalty free license under the following patents for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government. That is, adoption of a design for military specifications or the granting of qualifications to a supplier or manufacturer is conditional upon the existence of a royalty free license from the patent holder.~~

_____ Patent number and section _____ Patent expiration date

MIL-C-83522/16B
W/AMENDMENT 1

~~4812009~~

March 14, 1996

~~Item 62~~

~~Items 86 through 89~~

NOTES

Referenced documents. In addition to MIL-C-83522, this specification sheet references the following documents. (Government documents are available on line at <http://assist.daps.dla.mil/quicksearch> or www.dodssp.daps.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

SPECIFICATIONS

Department of Defense

Specifications

<u>MIL-PRF-85045</u>	<u>-</u>	<u>Cables, Fiber Optics, (Metric), General Specification For</u>
<u>MIL-C-83522/17</u>	<u>-</u>	<u>Connector, Fiber Optic, Single Terminus, Adapter, Bayonet Coupling (ST Style), 2.5 Millimeter Diameter Ferrule, Bulkhead Panel Mount</u>
<u>MIL-C-83522/18</u>	<u>-</u>	<u>Connector Fiber Optic, Single TERMINUS, RECEPTACLE, BAYONET COUPLING (ST STYLE), 2.5 MILLIMETER DIAMETER FERRULE, PC MOUNTING</u>

Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

<u>ASTM A-276</u>	<u>-</u>	<u>Standard Specification for Stainless Steel Bars and Shapes.</u>
<u>ASTM B-16</u>	<u>-</u>	<u>Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines</u>

(Application for copies of ASTM documents should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR

Preparing activity:
Air Force - 85DLA- CC

MIL-C-83522/16B
W/AMENDMENT 1

Navy - SH
Air Force - ~~85~~11
NASA = NA
DLA - CC

~~Agent:~~
~~DLA - ES~~

Review activity:
~~01~~)

(Project 6060-~~01540109~~)

Navy - ~~EC~~, AS, MC, OS
Air Force -- 02, 17, 19, 70, ~~80~~, ~~90~~, 99
~~DLA - ES~~